



SERIES 3230 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 10 (5) A 12 AND 24 V DC



PRODUCT FEATURES

- Attractive rocker switch (rocker separate)
- Million times proven, friction snap-action contact system
- Powerful with 100 000 switching cycles electrically and mechanically for DC voltage applications
- Indicator lamp identical
- Dust and water protected
- High variety
- With or without function illumination (LED)
- Installation from the front directly or with assembly frame
- Block connector support

ON REQUEST














- Other colors
- Other rocker symbols (laser etched)
- Other switching functions
- Other lamp variants
- With assembled rocker

Mechanical life endurance	10E4
Ambient temperature	-40 °C ... +85 °C
Material actuator housing terminals	PA glass fiber-reinforced PA silver plated
Miscellaneous	illumination with mounted rocker: day design = light gray / night design = pea green



SERIES 3230 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 10 (5) A 12 AND 24 V DC

 single-pole (rocker separate)	Lighting voltage (V)	Housing color	10 (5) A 24 V DC 1E5	10 (5) A 12 V DC 1E5	Terminal type	Terminal description	Miscellaneous	Stock version																											
Normally open contact latching 1-step (SPST)																																			
3230.0102	24	■	○			3.0 x 0.8	with search lighting LED green circuit symbol: 3.01																												
3230.0202	24	■	○			3.0 x 0.8	with function indicator LED red with search lighting LED green circuit symbol: 3.03																												
3230.0101	12	■		○		3.0 x 0.8	with search lighting LED green circuit symbol: 3.01																												
3230.0201	12	■		○		3.0 x 0.8	with function indicator LED red with search lighting LED green circuit symbol: 3.03																												
Normally open contact momentary 1-step (SPNO)																																			
3230.0302	24	■	○			3.0 x 0.8	with search lighting LED green circuit symbol: 3.02																												
3230.0301	12	■		○		3.0 x 0.8	with search lighting LED green circuit symbol: 3.02																												
<table border="1"> <thead> <tr> <th data-bbox="169 1106 437 1500">  double-pole (rocker separate) </th> <th data-bbox="437 1106 520 1500">Lighting voltage (V)</th> <th data-bbox="520 1106 603 1500">Housing color</th> <th data-bbox="603 1106 686 1500">10 (5) A 24 V DC 1E5</th> <th data-bbox="686 1106 769 1500">10 (5) A 12 V DC 1E5</th> <th data-bbox="769 1106 852 1500">Terminal type</th> <th data-bbox="852 1106 935 1500">Terminal description</th> <th data-bbox="935 1106 1382 1500">Miscellaneous</th> <th data-bbox="1382 1106 1423 1500">Stock version</th> </tr> </thead> <tbody> <tr> <td colspan="9" data-bbox="169 1500 1423 1552">Changeover switch latching 1-step (DPDT)</td> </tr> <tr> <td data-bbox="169 1552 437 1603">3230.1902</td> <td data-bbox="437 1552 520 1603">12</td> <td data-bbox="520 1552 603 1603">■</td> <td data-bbox="603 1552 686 1603">○</td> <td data-bbox="686 1552 769 1603"></td> <td data-bbox="769 1552 852 1603"></td> <td data-bbox="852 1552 935 1603">3.0 x 0.8</td> <td data-bbox="935 1552 1382 1603">with search lighting LED green circuit symbol: 3.09</td> <td data-bbox="1382 1552 1423 1603"></td> </tr> </tbody> </table>									 double-pole (rocker separate)	Lighting voltage (V)	Housing color	10 (5) A 24 V DC 1E5	10 (5) A 12 V DC 1E5	Terminal type	Terminal description	Miscellaneous	Stock version	Changeover switch latching 1-step (DPDT)									3230.1902	12	■	○			3.0 x 0.8	with search lighting LED green circuit symbol: 3.09	
 double-pole (rocker separate)	Lighting voltage (V)	Housing color	10 (5) A 24 V DC 1E5	10 (5) A 12 V DC 1E5	Terminal type	Terminal description	Miscellaneous	Stock version																											
Changeover switch latching 1-step (DPDT)																																			
3230.1902	12	■	○			3.0 x 0.8	with search lighting LED green circuit symbol: 3.09																												

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SWAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS








ECO






PUSH/DRIVE



SERIES 3230 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 10 (5) A 12 AND 24 V DC

 Combination (rocker separate)	Lighting voltage (V)	Housing color	10 (5) A 24 V DC 1E5	10 (5) A 12 V DC 1E5	Terminal type	Terminal description	Miscellaneous	Stock version
Changeover switch latching 2-step (SPDT)								
3230.0502	24		○			3.0 x 0.8	2 x single-pole changeover switch with search lighting LED green circuit symbol: 3.31	
3230.0602	24		○			3.0 x 0.8	2 x single-pole changeover switch with function indicator LED red with search lighting LED green circuit symbol: 3.33	
3230.0501	12			○		3.0 x 0.8	2 x single-pole changeover switch with search lighting LED green circuit symbol: 3.31	
3230.0601	12			○		3.0 x 0.8	2 x single-pole changeover switch with function indicator LED red with search lighting LED green circuit symbol: 3.33	
Changeover switch momentary 2-step (SPDT momentary)								
3230.0702	24		○			3.0 x 0.8	2 x single-pole changeover switch with search lighting LED green circuit symbol: 3.32	
3230.0701	12			○		3.0 x 0.8	2 x single-pole changeover switch with search lighting LED green circuit symbol: 3.32	


 Lamp (rocker separate)	Lighting voltage (V)	Housing color	10 (5) A 24 V DC 1E5	10 (5) A 12 V DC 1E5	Terminal type	Terminal description	Miscellaneous	Stock version
Lamp								
3237.0102	24 24					3.0 x 0.8	LED red / red	
3237.0104	24 24					3.0 x 0.8	LED red / green	
3237.0106	24 24					3.0 x 0.8	LED green / green	
3237.0108	24 24					3.0 x 0.8	LED yellow / green	

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH/DRIVE



SERIES 3230 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 10 (5) A 12 AND 24 V DC

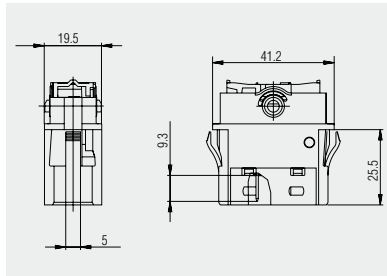

Quick-connect terminal 3.0 x 0.8

Basic types 3230 and 3237




Rocker

190.389.011 - without stop
(switching function both sides)

190.389.021 - with stop
(switching function one side)

Cap


203.442.011 - with stop both
sides (for lamp 3237)

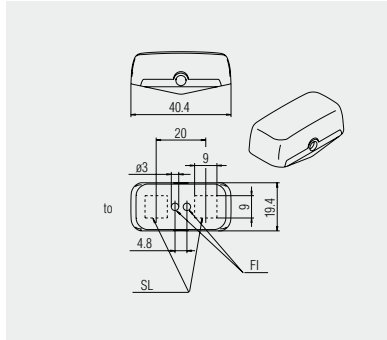

Snap-on rocker for basic type 3230 and cap for basic type 3237 (without switching function) painted black with or without stop for both or one-sided switching function. Laser etched by customer or on request.

Note:

Rocker must be ordered separately in addition to the basic switch. Assembly on customer side.

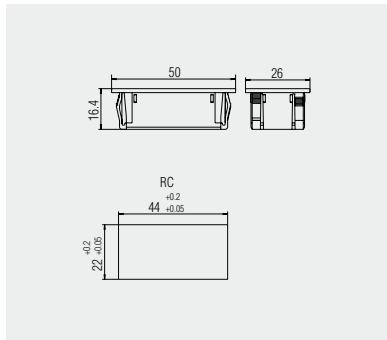

Installation frame for basic types 3230 and 3237 in black

Installation frame
217.353.021



Dummy piece for the basic types 3230 and 3237 with mounted black cap

Dummy piece
203.069.013

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS




ECO

PUSH/DRIVE



SERIES 3230 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 10 (5) A 12 AND 24 V DC

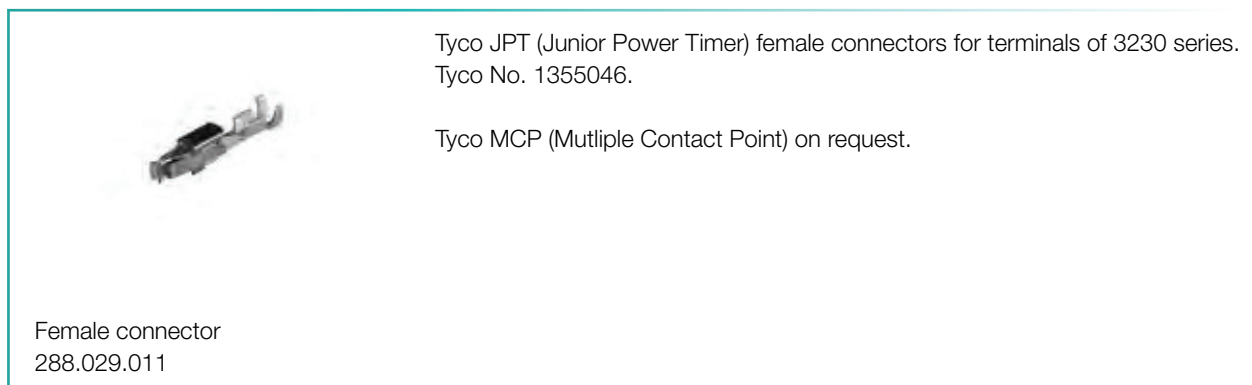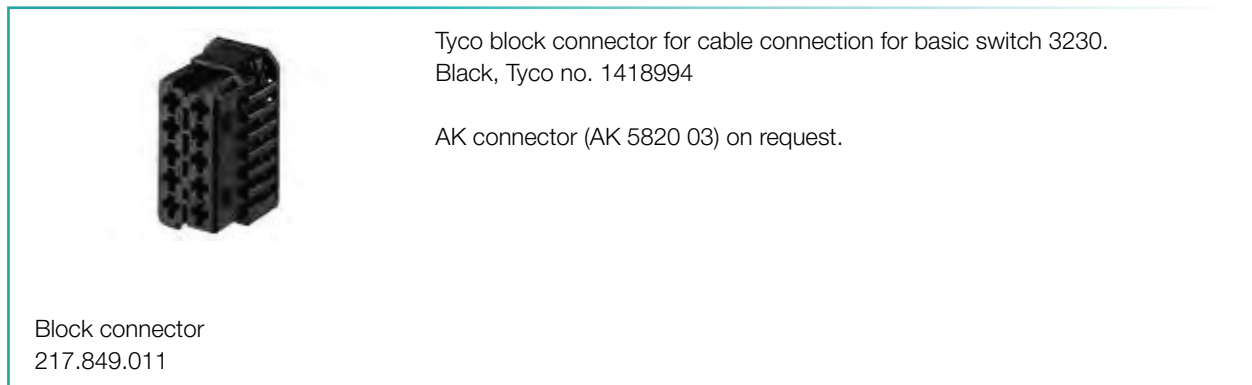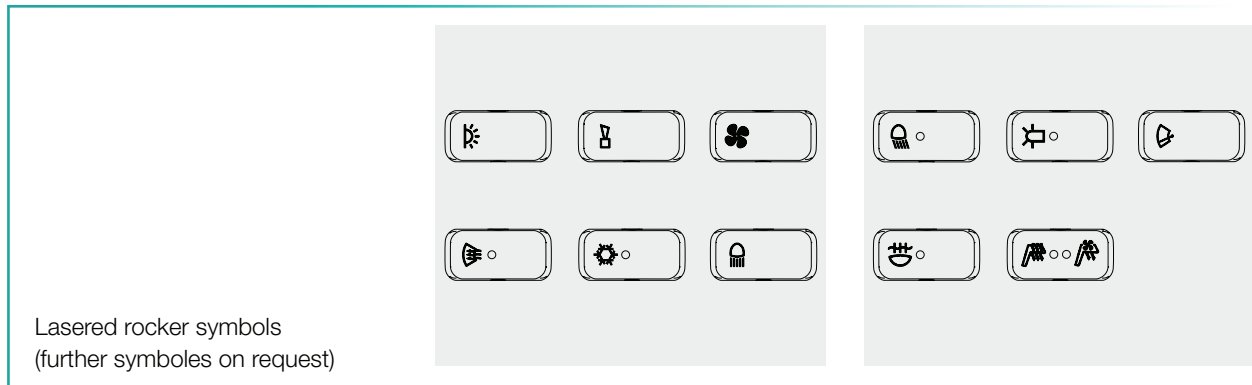

Further information under

WWW.MARQUARDT-SWITCHES.COM



SERIES 3230 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES

TO 10 (5) A 12 AND 24 V DC

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES


MICRO-SIGNAL SWITCHES

SENSORS


ECO

PUSH/DRIVE


Circuit symbols

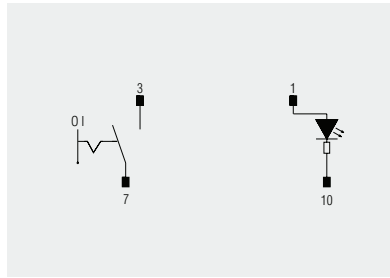


Circuit symbol: 3.01

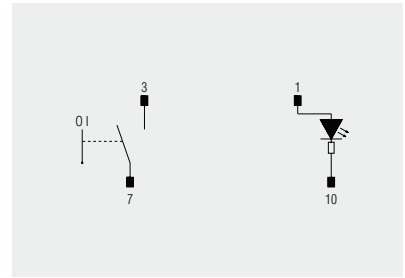


Circuit symbol: 3.02

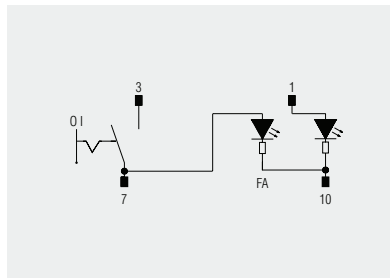


Circuit symbol: 3.03

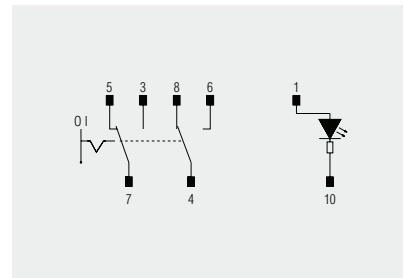


Circuit symbol: 3.09

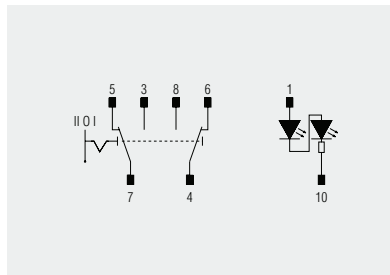

Circuit symbol: 3.31

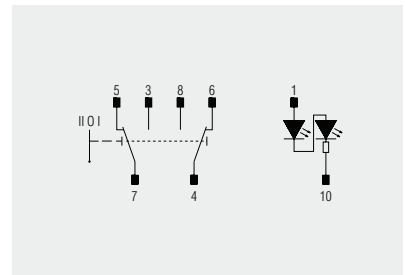

Circuit symbol: 3.32

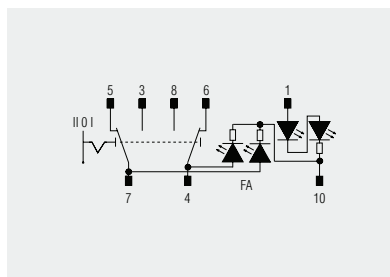

Circuit symbol: 3.33

➔ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5



PRODUCT FEATURES

- ➔ High dust and water protection with IP 66 and IP 68
- ➔ Unique and millions of times proven snap-action switching system
- ➔ Self cleaning due to relative movement
- ➔ Up to 4 integrated LEDs for background and function illumination
- ➔ Mechanical life $\geq 500\,000$ cycles
- ➔ Wide range up to 20 A at 12 / 24 VDC
- ➔ Large variety of all required switching and circuit options
- ➔ Attractive design with various cap shapes and colors
- ➔ Large selection of laser etched symbols and accessories
- ➔ Individually configurable on www.marquardt-switches.com/configurator3250

























ON REQUEST

- ➔ Further cap symbols (laser etched)
- ➔ Further switching functions
- ➔ Further illumination variants
- ➔ Further cap colors
- ➔ Customer specific cap style

Mechanical life endurance	50E4
Operating force	7 N to 12 N +1,5 N
Contact resistance (new condition)	< 100 mOhm (1 A 12 V DC)
Insulation resistance (new condition)	> 100 MOhm (500 V DC)
Proof tracking	250 PTI
Actuator	IP 66 and IP 68 actuator side
Ambient temperature	terminal side -40 °C ... +85 °C actuating side -40 °C ... +85 °C
Material actuator housing terminals	PA glass fiber-reinforced / PC PA / PP silver plated
Terminal type	Quick-connect terminal
Lighting type	Symbol position 1 + 2 green; red function illumination red; yellow external function illumination red; yellow
Lighting voltage	24 V 12 V

➤ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5

 single-pole	Lighting voltage (V)	Housing color	20 (10) A 24 V DC 1E5	20 (10) A 12 V DC 1E5	10 (5) A 24 V DC 1E5	10 (5) A 12 - 24 V DC 1E5	10 (5) A 12 V DC 1E5	< 100 mA 24 V DC 5E5	< 100 mA 12 V DC 5E5	Terminal type	Terminal description	Product code	Miscellaneous	Stock version
	ON / OFF switch (SPST)													
3250.0009	24	○									3.0 x 0.8	3250-1A-30-3-0	with search lighting LED green circuit symbol: 50.01	
3250.0033	24	○									3.0 x 0.8	3250-1A-40-3-0	with search lighting LED red circuit symbol: 50.01	
3250.0007	24			○							3.0 x 0.8	3250-1A-30-1-0	with search lighting LED green circuit symbol: 50.01	
3250.0013	24			○							3.0 x 0.8	3250-1A-31-1-0	with function indicator LED red with search lighting LED green circuit symbol: 50.13	
3251.0002	24			○							3.0 x 0.8	3250-1A-31-1-0-A0-bl-0719-0000-01	with function indicator LED red with search lighting LED green with pre assembled cap circuit symbol: 50.13	
3251.0005	24			○							3.0 x 0.8	3250-1A-31-1-0-A0-re-1360-0000-00	with search lighting LED green with pre assembled cap circuit symbol: 50.01	
3250.0006	12			○							3.0 x 0.8	3250-1A-10-3-0	with search lighting LED green circuit symbol: 50.01	
3250.0030	12			○							3.0 x 0.8	3250-1A-20-3-0	with search lighting LED red circuit symbol: 50.01	
3250.0001					○						3.0 x 0.8	3250-1A-00-1-0	circuit symbol: 50.43	
Normally open contact (SPNO)														
3250.0060	24	○									3.0 x 0.8	3250-1B-30-3-0	with search lighting LED green circuit symbol: 50.02	
3250.0072	24	○									3.0 x 0.8	3250-1B-40-3-0	with search lighting LED red circuit symbol: 50.02	
3250.0057	12			○							3.0 x 0.8	3250-1B-10-3-0	with search lighting LED green circuit symbol: 50.02	
3250.0069	12			○							3.0 x 0.8	3250-1B-20-3-0	with search lighting LED red circuit symbol: 50.02	
3250.0052					○						3.0 x 0.8	3250-1B-00-1-0	circuit symbol: 50.44	
Changeover switch (SPDT)														
3250.0118	24			○							3.0 x 0.8	3250-1E-31-1-0	with function indicator LED red with search lighting LED green circuit symbol: 50.17	
3250.0142	24			○							3.0 x 0.8	3250-1E-41-1-0	with function indicator LED yellow with search lighting LED red circuit symbol: 50.17	
3250.0115	12				○						3.0 x 0.8	3250-1E-11-1-0	with function indicator LED red with search lighting LED green circuit symbol: 50.17	
3250.0139	12				○						3.0 x 0.8	3250-1E-21-1-0	with function indicator LED yellow with search lighting LED red circuit symbol: 50.17	
3250.0106					○						3.0 x 0.8	3250-1E-00-1-0	circuit symbol: 50.47	
Changeover switch (SPDT momentary)														
3250.0163	24			○							3.0 x 0.8	3250-1F-30-1-0	with search lighting LED green circuit symbol: 50.06	
3250.0170	24					○					3.0 x 0.8	3250-1F-34-2-0	with function indicator LED red with search lighting LED green circuit symbol: 50.24	
3250.0160	12				○						3.0 x 0.8	3250-1F-10-1-0	with search lighting LED green circuit symbol: 50.06	
3250.0167	12							○			3.0 x 0.8	3250-1F-14-2-0	with function indicator LED red with search lighting LED green circuit symbol: 50.24	

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SWAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES














SENSORS

ECO

PUSH/DRIVE

➤ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68
























TO 20 (10) A 12 AND 24 V DC 1E5

 double-pole	Lighting voltage (V)	Housing color										Terminal type	Terminal description	Product code	Miscellaneous	Stock version	
		20 (10) A 24 V DC 1E5	20 (10) A 12 V DC 1E5	10 (5) A 24 V DC 1E5	10 (5) A 12 - 24 V DC 1E5	10 (5) A 12 V DC 1E5	< 100 mA 24 V DC 5E5	< 100 mA 12 V DC 5E5									
ON / OFF switch (DPST)																	
3250.0196	24					○							3.0 x 0.8	3250-2A-31-1-0	with function indicator LED red with search lighting LED green circuit symbol: 50.25		
3250.0184					○								3.0 x 0.8	3250-2A-00-1-0	circuit symbol: 50.49		
Changeover switch (DPDT)																	
3250.0301	24			○									3.0 x 0.8	3250-2E-31-1-0	with function indicator LED red with search lighting LED green circuit symbol: 50.29		
3250.0325	24			○									3.0 x 0.8	3250-2E-41-1-0	with function indicator LED yellow with search lighting LED red circuit symbol: 50.29		
3250.0298	12					○							3.0 x 0.8	3250-2E-11-1-0	with function indicator LED red with search lighting LED green circuit symbol: 50.29		
3250.0322	12					○							3.0 x 0.8	3250-2E-21-1-0	with function indicator LED yellow with search lighting LED red circuit symbol: 50.29		
3251.0003	12					○							3.0 x 0.8	3250-2E-21-1-0-B0-bl-1370-0000-01	with function indicator LED yellow with search lighting LED red with pre assembled cap circuit symbol: 50.29		
3250.0289					○								3.0 x 0.8	3250-2E-00-1-0	circuit symbol: 50.53		
Changeover switch (DPDT momentary)																	
3250.0346	24			○									3.0 x 0.8	3250-2F-30-1-0	with search lighting LED green circuit symbol: 50.42		
3250.0353	24					○							3.0 x 0.8	3250-2F-35-2-0	with function indicator LED red with search lighting LED green circuit symbol: 50.36		
3250.0343	12					○							3.0 x 0.8	3250-2F-10-1-0	with search lighting LED green circuit symbol: 50.42		
3250.0350	12							○					3.0 x 0.8	3250-2F-15-2-0	with function indicator LED red with search lighting LED green circuit symbol: 50.36		

ROCKERSWITCHES
 PUSHBUTTON SWITCHES
 TOGGLE SWITCHES
 SLIDE SWITCHES
 ROTARY SWITCHES
 FOOT SWITCHES
 TACT AND KEY SWITCHES
 SMP-ACTION SWITCHES
 MICRO-SIGNAL SWITCHES
 SENSORS
 ECO
 PUSH'DRIVE

➔ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5

 Combination	Lighting voltage (V)	Housing color	20 (10) A 24 V DC 1E5	20 (10) A 12 V DC 1E5	10 (5) A 24 V DC 1E5	10 (5) A 12 - 24 V DC 1E5	10 (5) A 12 V DC 1E5	< 100 mA 24 V DC 5E5	< 100 mA 12 V DC 5E5	Terminal type	Terminal description	Product code	Miscellaneous	Stock version
	3-step OFF-ON-ON switch (2xSPST)													
3250.0649					○						3.0 x 0.8	3250-5A-00-1-0	circuit symbol: 50.139	
Changeover switch with OFF-position in the center (2xSPST - Center OFF)														
3250.0379	24				○						3.0 x 0.8	3250-3A-34-1-0	with function indicator LED red with search lighting LED green circuit symbol: 50.113	
3250.0436	24				○						3.0 x 0.8	3250-3B-39-1-0	with search lighting LED green circuit symbol: 50.108 momentary function both sides	
3250.0431	24							○			3.0 x 0.8	3250-3B-48-2-0	with function indicator LED yellow with search lighting LED red circuit symbol: 50.128 momentary function both sides	
3250.0376	12						○				3.0 x 0.8	3250-3A-14-1-0	with function indicator LED red with search lighting LED green circuit symbol: 50.113	
3250.0433	12						○				3.0 x 0.8	3250-3B-19-1-0	mit Suchbeleuchtung LED grün Schaltzeichen: 50.108 Tastfunktion beidseitig	
3251.0004	12						○				3.0 x 0.8	3250-3B-19-1-0-B0-bl-1390-1380-00	mit Suchbeleuchtung LED grün Schaltzeichen: 50.108 Tastfunktion beidseitig	
3250.0428	12							○			3.0 x 0.8	3250-3B-28-2-0	mit Funktionsanzeige LED gelb mit Suchbeleuchtung LED rot Schaltzeichen: 50.126 Tastfunktion beidseitig	
3250.0367					○						3.0 x 0.8	3250-3A-00-1-0	Schaltzeichen: 50.121	
3250.0418					○						3.0 x 0.8	3250-3B-00-1-0	Schaltzeichen: 50.122 Tastfunktion beidseitig	
3-step changeover switch (2xSPDT)														
3250.0514	24				○						3.0 x 0.8	3250-4A-34-1-0	mit Funktionsanzeige LED rot mit Suchbeleuchtung LED grün Schaltzeichen: 50.117	
3250.0577	24				○						3.0 x 0.8	3250-4B-39-1-0	mit Suchbeleuchtung LED grün Schaltzeichen: 50.112 Tastfunktion beidseitig	
3250.0616	24				○						3.0 x 0.8	3250-4C-38-1-0	mit Funktionsanzeige LED rot mit Suchbeleuchtung LED grün Schaltzeichen: 50.137 Tastfunktion einseitig	
3250.0572	24							○			3.0 x 0.8	3250-4B-38-2-0	mit Funktionsanzeige LED rot mit Suchbeleuchtung LED grün Schaltzeichen: 50.132 Tastfunktion beidseitig	
3250.0590	24							○			3.0 x 0.8	3250-4B-48-2-0	mit Funktionsanzeige LED gelb mit Suchbeleuchtung LED rot Schaltzeichen: 50.132 Tastfunktion beidseitig	
3250.0511	12						○				3.0 x 0.8	3250-4A-14-1-0	mit Funktionsanzeige LED rot mit Suchbeleuchtung LED grün Schaltzeichen: 50.117	
3250.0574	12						○				3.0 x 0.8	3250-4B-19-1-0	mit Suchbeleuchtung LED grün Schaltzeichen: 50.112 Tastfunktion beidseitig	
3250.0613	12						○				3.0 x 0.8	3250-4C-18-1-0	mit Funktionsanzeige LED rot mit Suchbeleuchtung LED grün Schaltzeichen: 50.137 Tastfunktion einseitig	
3250.0569	12							○			3.0 x 0.8	3250-4B-18-2-0	mit Funktionsanzeige LED rot mit Suchbeleuchtung LED grün Schaltzeichen: 50.132 Tastfunktion beidseitig	
3250.0587	12							○			3.0 x 0.8	3250-4B-28-2-0		
3251.0001	12							○			3.0 x 0.8	3250-4B-28-2-0-B0-bl-1213-1223-02	mit Funktionsanzeige LED gelb mit Suchbeleuchtung LED rot Schaltzeichen: 50.132 Tastfunktion beidseitig	
3250.0496					○						3.0 x 0.8	3250-4A-00-K1-0	Schaltzeichen: 50.125	

ROCKERSWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SWAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES


SENSORS

ECO

PUSH/DRIVE


➤ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5

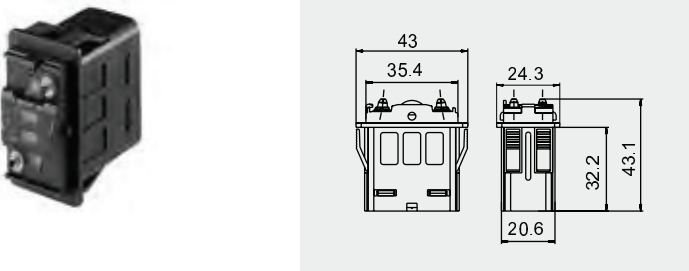

Series 3250


Quick-connect terminal 3.0 x 0.8

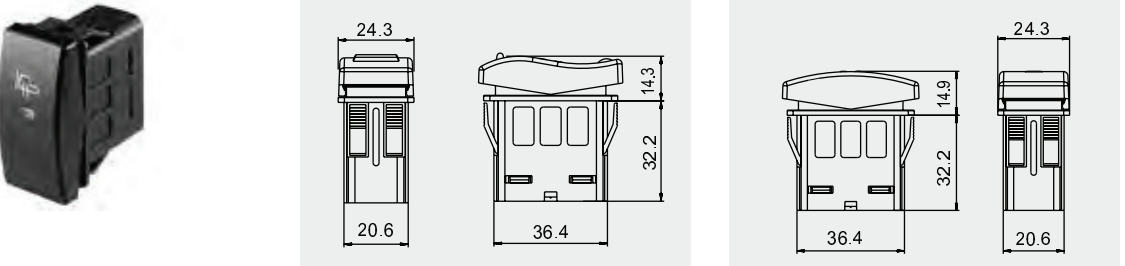

Series 3250

Quick-connect terminal 3.0 x 0.8

Quick-connect terminal 3.0 x 0.8



Cap design 1

Snap-on cap for basic type 3250. Painted black or red. With or without light guide for function illumination. Laser etched by customer or on request.

Versions with locking function:

- lock 1 in neutral position
- lock 2 in actuated position
- lock 3 in both positions

Note: Rocker must be ordered separately in addition to the basic switch. Assembly on request or on customer side.

black	lock 1	lock 3
203.990.015 - no light guide	203.107.016 - bl.; no light g.	203.107.036 - bl.; no light g.
203.105.016 - 1 light guide	203.107.046 - bl.; 1 light g.	203.107.066 - bl.; 1 light g.
203.105.026 - 2 light guide	203.107.076 - red.; no light g.	203.107.096 - red.; no light g.
	203.107.106 - red.; 1 light g.	203.107.126 - red.; 1 light g.
red	lock 2	
203.990.045 - kein light guide	203.107.026 - bl.; no light g.	
203.105.036 - 1 light guide	203.107.056 - bl.; 1 light g.	
203.105.046 - 2 light guide	203.107.086 - red.; no light g.	
	203.107.116 - red.; 1 light g.	

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SNAP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSHN'DRIVE

➤ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5




Cap design 2

black

- 203.991.015 - no light guide
- 203.106.016 - 1 light guide
- 203.106.026 - 2 light guide

red

- 203.991.045 - kein light guide
- 203.106.036 - 1 light guide
- 203.106.046 - 2 light guide

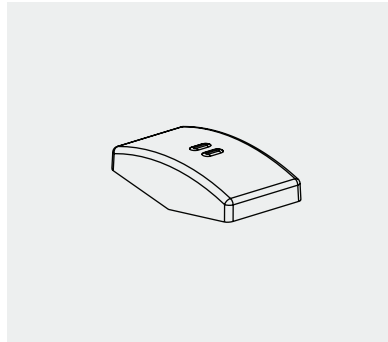

lock 1

- 203.108.016 - bl.; no light g.
- 203.108.046 - bl.; 1 light g.
- 203.108.076 - red; no light g.
- 203.108.106 - red.; 1 light g.

lock 2

- 203.108.026 - bl.; no light g.
- 203.108.056 - bl.; 1 light g.
- 203.108.086 - red.; no light g.
- 203.108.116 - red.; 1 light g.

Snap-on cap for basic type 3250. Painted black or red. With or without light guide for function illumination. Laser etched by customer or on request.

Versions with locking function:

- lock 1 in neutral position
- lock 2 in actuated position
- lock 3 in both positions

Note: Rocker must be ordered separately in addition to the basic switch. Assembly on request or on customer side.



lock 3

- 203.108.036 - bl.; no light g.
- 203.108.066 - bl.; 1 light g.
- 203.108.096 - red.; no light g.
- 203.108.126 - red.; 1 light g.





Assembly frame

- Can be stringed together; black
- 217.887.011 (end piece)
 - 217.887.021 (center piece)

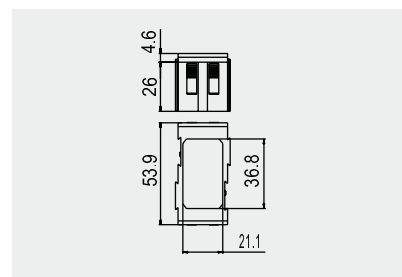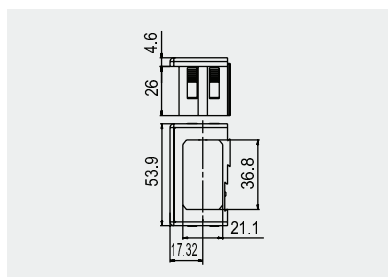



➤ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5



Adapter frame
217.879.011

Adapter frame for basic type 3250 in black. For cut-out 44 mm x 22 mm.


Panel seal
343.171.011
Seal for adapter frame
343.171.021

Panel seal for base switch 3250 / adapter frame 217.879.011. Dust- and water protection IP 67 from actuation side (correct customer assembly mandatory). Assembly on customers side or on demand. Thickness 1.5 mm; black.

Hole plug
237.036.011

Hole plug for basic type 3250. With support for block connector.

Pilot light 3257

Pilot light 3257 in the same design as basic type 3250 without switching function. With 2 LEDs. Different colors available on demand. Each LED individually controllable. Laser inscription by customer or on request.

➤ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5



Tyco block connector for cable connection for basic switch 3250.
Black, Tyco no. 1418994

AK connector (AK 5820 03) on request.

Block connector
217.849.011



Tyco JPT (Junior Power Timer) female connectors for terminals of 3250 series.
Tyco No. 1355046.

Tyco MCP (Multiple Contact Point) on request.

Female connector
288.029.011




Lasered rocker symbols
(examples)
more on request


➤ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5


Circuit symbols

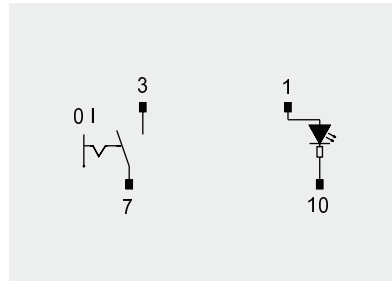


50.01

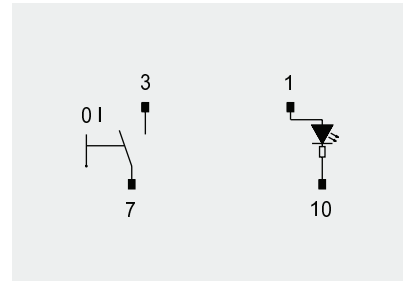


50.02

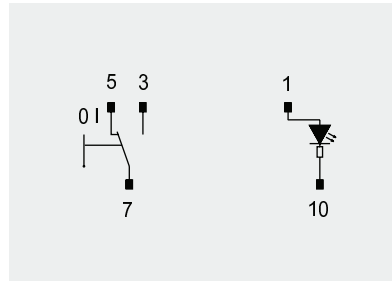


50.06

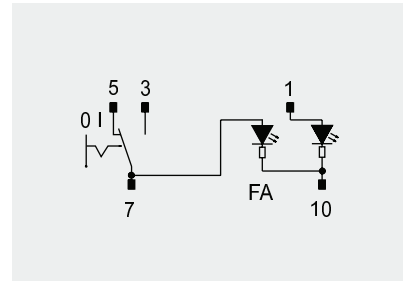


50.17

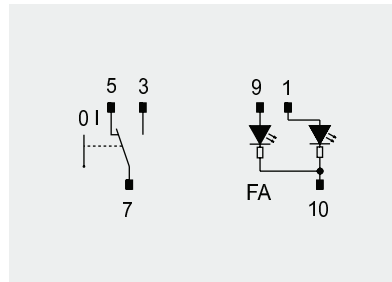


50.24

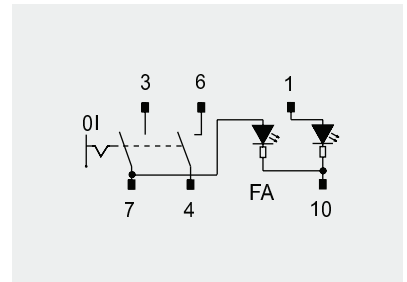


50.25

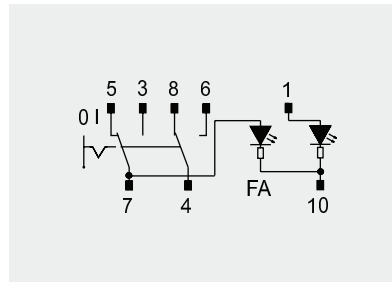


50.29

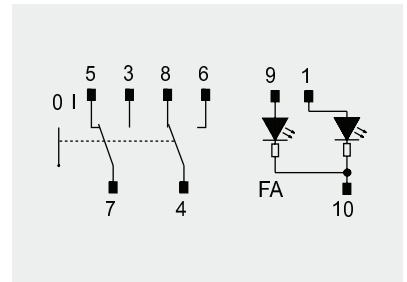

50.36

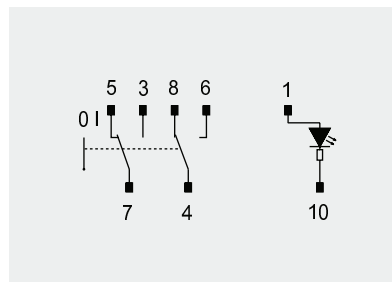

50.42

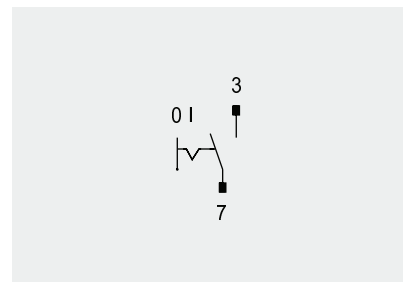


50.43

ROCKER SWITCHES
PUSHBUTTON SWITCHES
TOGGLE SWITCHES
SLIDE SWITCHES
ROTARY SWITCHES
FOOT SWITCHES
TACT AND KEY SWITCHES
SMP-ACTION SWITCHES
MICRO-SIGNAL SWITCHES
SENSORS
ECO
PUSH'DRIVE


➤ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5


Circuit symbols
(continue from page 91)

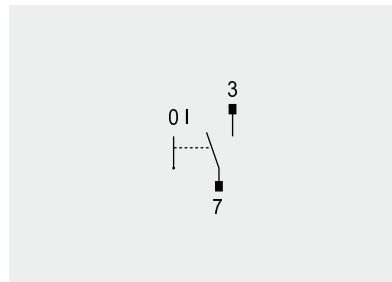


50.44

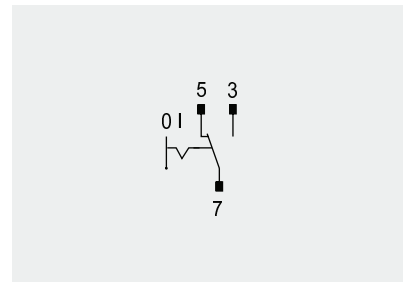


50.47

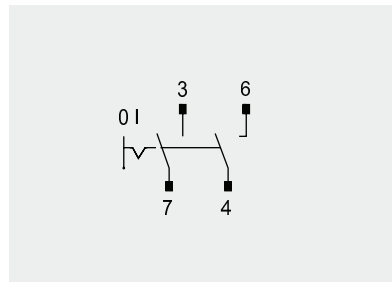


50.49

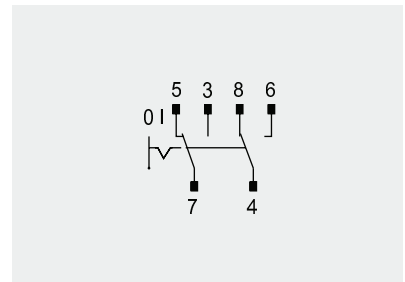


50.53

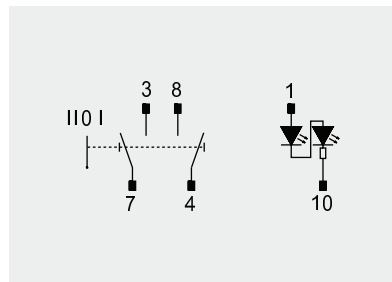


50.108

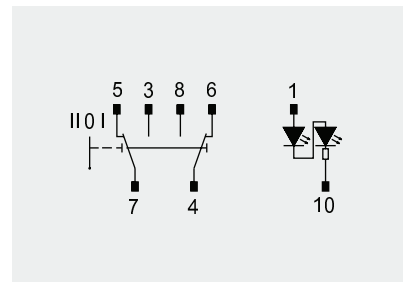


50.112

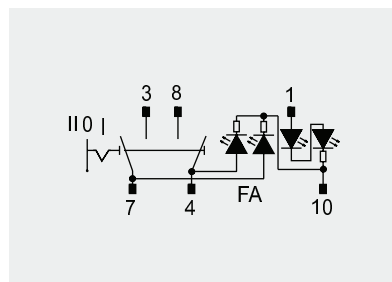


50.113

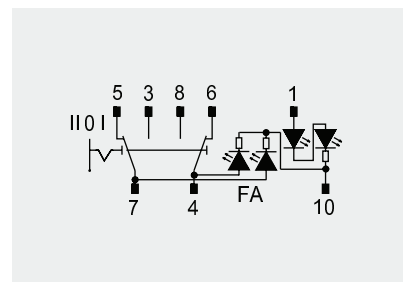

50.117

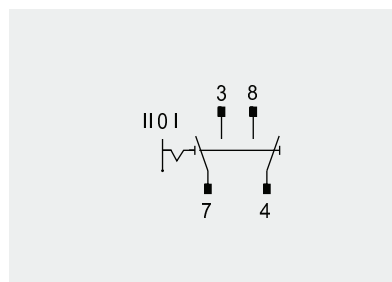

50.121

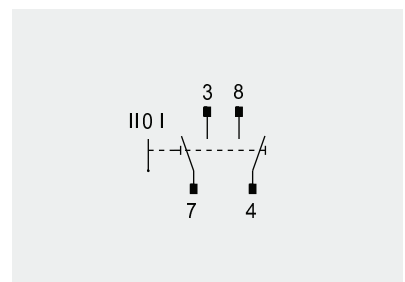


50.122


➤ SERIES 3250 - SINGLE AND DOUBLE-POLE ROCKER SWITCHES IP 66/IP 68

TO 20 (10) A 12 AND 24 V DC 1E5


Circuit symbols
(continue from page 92)

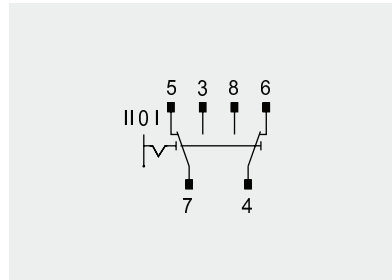


50.125

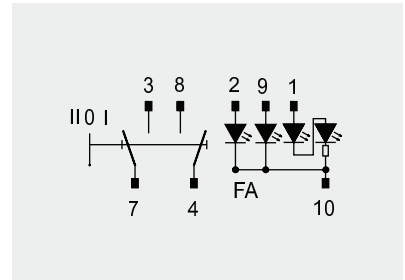


50.128

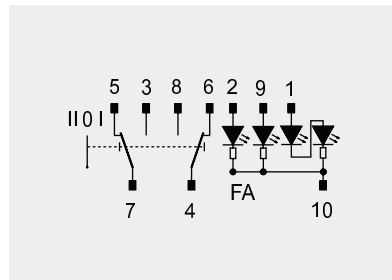

50.132

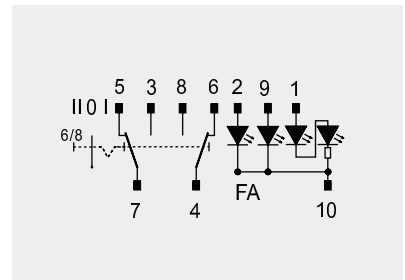

50.137

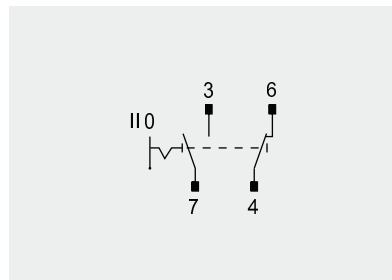

50.139

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSHN'DRIVE